FREEWAY II™

How to change the fuse?

1

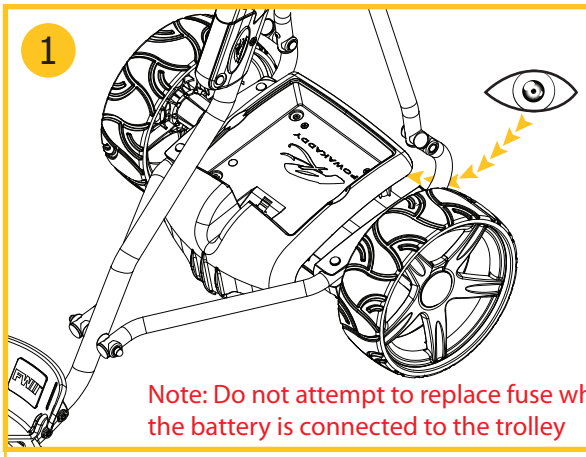

Note: Do not attempt to replace fuse while the battery is connected to the trolley

On the under side of the battery tray you will see a controller box.

2

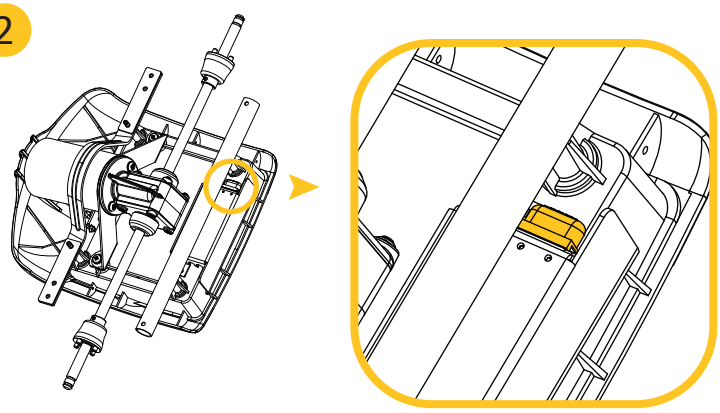

You will see a small plastic cover on one side of the controller, this can be removed by hand or levered off gently with a screwdriver.

3

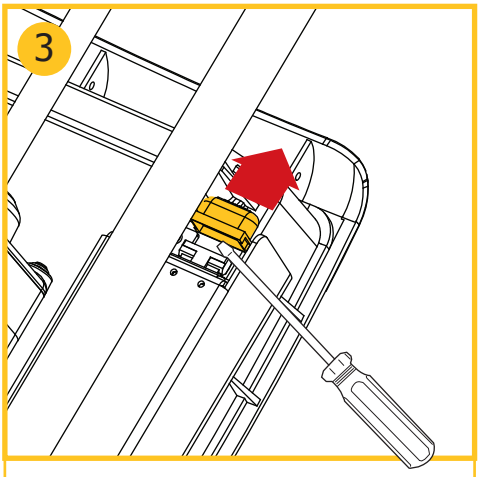

Once the cover is removed you will see a coloured fuse.

4

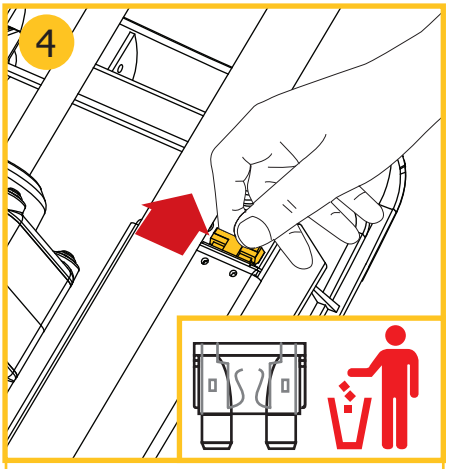

This can be pulled out by hand, if you find it stiff to pull out then gently grip it with pliers and pull.

5

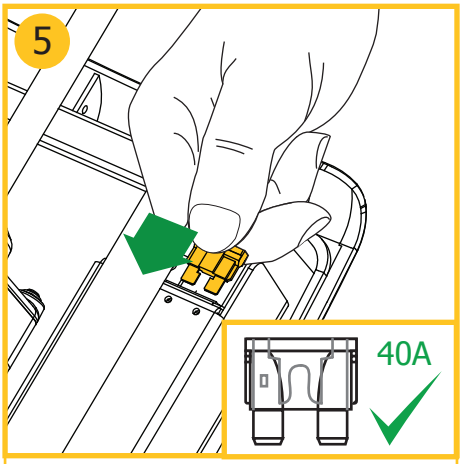

The fuse is a 40A fuse the same as found in most cars, only use a 40 amp fuse.

6

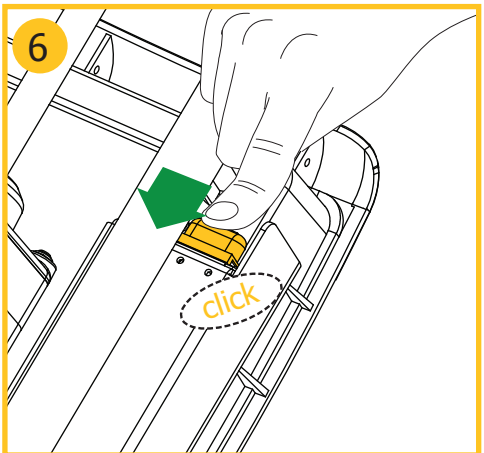

The new fuse then needs to be fitted into the fuse holder and the cover replaced.

7

Once you have fitted the new fuse and replaced the cap, turn over the trolley re-mount the battery ensuring the lead is positioned correctly and test.

Should you find this does not solve the problem please contact your nearest Authorised Powakaddy Service Agent.

Why did the fuse fail?

The fuse on the controller is fitted as a protection against connecting the battery in reverse (positive to negative and negative to positive).

The 'T' Connector is offset to match the battery top, if you inadvertently force the connector into the battery top the wrong way round it may cause the fuse to fail.